

# Stainless steel and magnetism



Ugitech



# Ugitech offers a range of grades completely dedicated to magnetic applications


**Ugitech has recognized expertise thanks to more than twenty-five years' experience in the production of products for soft magnetic cores.**

Thanks to its research and development centre on the cutting edge of innovation and its technical support, Ugitech is able to assist you with the choice of materials, to improve performance and develop your solutions.

Ugitech provides its customers with fully integrated production, allowing complete control of quality, from the liquid metal to the inspected magnetic bar.

To meet the market requirements, Ugitech has acquired standardized means of measurement: permeameter and coercimeter to qualify materials' static and dynamic magnetic behaviour.

Ugitech, in the Swiss Steel Group, has a global commercial presence thanks to its international sales network.

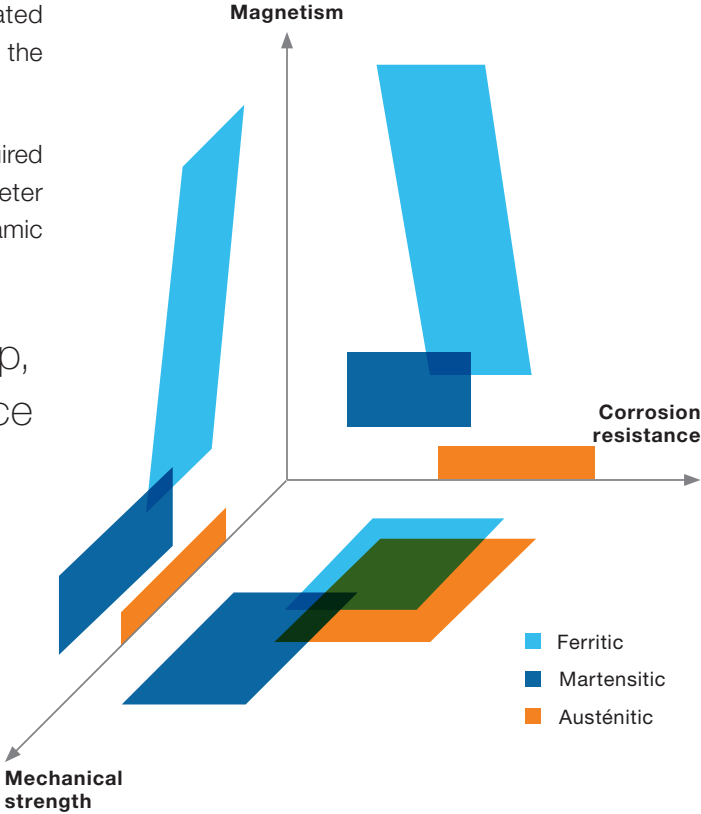

Properties	Grades	Functions	Applications	Markets
Ferromagnetic	Ferritic	Magnetic cores, solenoids	Solenoid valves Electric pumps Injectors	Automotive, food, electricity, industrial processes (chemicals, petrochemicals)
	Martensitic	Magnetic coupling parts	Electromagnets Switch-disconnectors	
Non-magnetic	Austenitic	Insensitive to magnetic fields		Building Metrology

## A broad range of grades to meet your needs

Ugitech brands	Standards			Chemical composition									
	EN 10088-3	ASTM / AISI	Other	C	Si	Mn	Ni	Cr	Mo	Cu	S	N	Nb
UGIPERM® 12FM				≤ 0.02	1 – 2	≤ 0.5	≤ 0.5	11 – 13	≤ 0.7	≤ 0.5	0.15 – 0.25	≤ 0.07	
UGI® 4016LS	1.4016	430		≤ 0.03	≤ 0.75	≤ 1	≤ 0.8	16 – 18	≤ 0.6	≤ 0.5	≤ 0.03	≤ 0.07	
UGI® 4511*	1.4511	430		≤ 0.05	≤ 1	≤ 1	≤ 0.6	16 – 18	≤ 0.6	≤ 0.5	≤ 0.03	≤ 0.02	0.2 – 0.3
UGI® 430F1	1.4105	430F	ASTM A838 Alloy 1	≤ 0.065	0.3 – 0.7	≤ 0.8	≤ 0.6	17.25 – 18.25	≤ 0.5		0.25 – 0.4		
UGI® 4113	1.4113	434		≤ 0.08	≤ 1	≤ 1	≤ 0.6	16 – 18	0.9 – 1.4	≤ 0.5	≤ 0.03	≤ 0.07	
UGI® 4105B	1.4105	430F		≤ 0.05	≤ 0.6	≤ 1.5	≤ 0.6	16 – 18	0.2 – 0.6	≤ 0.5	0.15 – 0.3	≤ 0.07	
UGI® 4105*	1.4105	430F		≤ 0.08	≤ 0.6	≤ 1.5	≤ 0.6	16 – 18	0.2 – 0.6	≤ 0.5	0.15 – 0.35	≤ 0.07	
UGI® 4105Si UGI® 430FR	1.4105	430FR	ASTM A838 Alloy 2	≤ 0.08	≤ 1.5	≤ 1.5	≤ 0.6	16 – 18	0.2 – 0.6	≤ 0.5	0.15 – 0.36	≤ 0.07	
UGIPERM® 17FM*				≤ 0.020	≤ 0.6	≤ 1.5	≤ 0.6	18 – 19	0.2 – 0.6	≤ 0.5	0.15 – 0.3	≤ 0.02	0.2 – 0.35
UGI® 4106 IMRE®	1.4106		IMRE®	≤ 0.030	1.3 – 1.5	≤ 0.6	≤ 0.5	17.5 – 18	1.5 – 2	≤ 0.5	0.23 – 0.28	≤ 0.07	
UGI® 4114	1.4114			0.05 – 0.08	≤ 1	≤ 1	≤ 0.5	17.5 – 19	1.5 – 2.5	≤ 0.5	0.15 – 0.25	≤ 0.07	
UGI® 4034*	1.4034	420	420D	0.43 – 0.50	≤ 0.7	≤ 1	≤ 0.6	12.5 – 14.5	≤ 0.5	≤ 0.5	≤ 0.03	≤ 0.1	
UGI® 4313	1.4313	415		≤ 0.05	≤ 0.7	≤ 1.5	3.5 – 4.5	12 – 14	0.3 – 0.7	≤ 0.5	≤ 0.015	0.02 – 0.07	
UGI® 4418	1.4418			≤ 0.06	≤ 0.7	≤ 1.5	4 – 6	15 – 17	0.8 – 1.5	≤ 0.5	≤ 0.03	0.02 – 0.07	
UGI® 4542*	1.4542	630	17-4 PH	≤ 0.07	≤ 0.7	≤ 1.5	3 – 5	15 – 17	≤ 0.6	3 – 5	≤ 0.03	≤ 0.07	0.05 – 0.45

\* Grades also available in UGIMA® version (enhanced machinability)

# Ferritic steels

Ugitech offers a comprehensive range of ferritic stainless steels with soft magnetic properties, specifically for electromagnetic actuators.


The choice of the most suitable grade for a given application is a trade-off between magnetic properties, electrical resistivity, corrosion resistance, machinability and weldability.

## A comparison of the main soft ferritic grades (magnetic properties shown in the magnetically annealed condition)

Grades	$\mu_r$ max	Hc (A/m)	Br (T)	Js (T)	$\rho$ ( $\mu\Omega.cm$ )	Corrosion	Machinability
UGIPERM® 12FM	2000	130	0.8	1.69	79	•	•••
UGI® 4016LS	1500	160	0.7	1.65	58	•••	••
UGI® 4511	2000	130	0.8	1.64	58	•••	••
UGI® 430F1	1050	350	0.8	1.57	61	••	•••
UGI® 4113	1700	180	0.9	1.62	60	••••	••
UGI® 4105B	1400	240	0.8	1.6	62	••	•••
UGI® 4105	700	400	0.6	1.61	62	••	•••
UGI® 4105Si UGI® 430FR	1600	150	0.6	1.54	78	••	•••
UGIPERM® 17FM	1800	180	0.9	1.58	60	••••	•••
UGI® 4106/IMRE®	1600	150	0.7	1.5	76	••••	•••
UGI® 4114	800	600	0.8	1.56	60	•••	•••

For other more specific grades or other metallurgical states, please consult us.

## Positioning of the Ugitech ferritic steel offer according to pitting corrosion resistance and relative permeability.

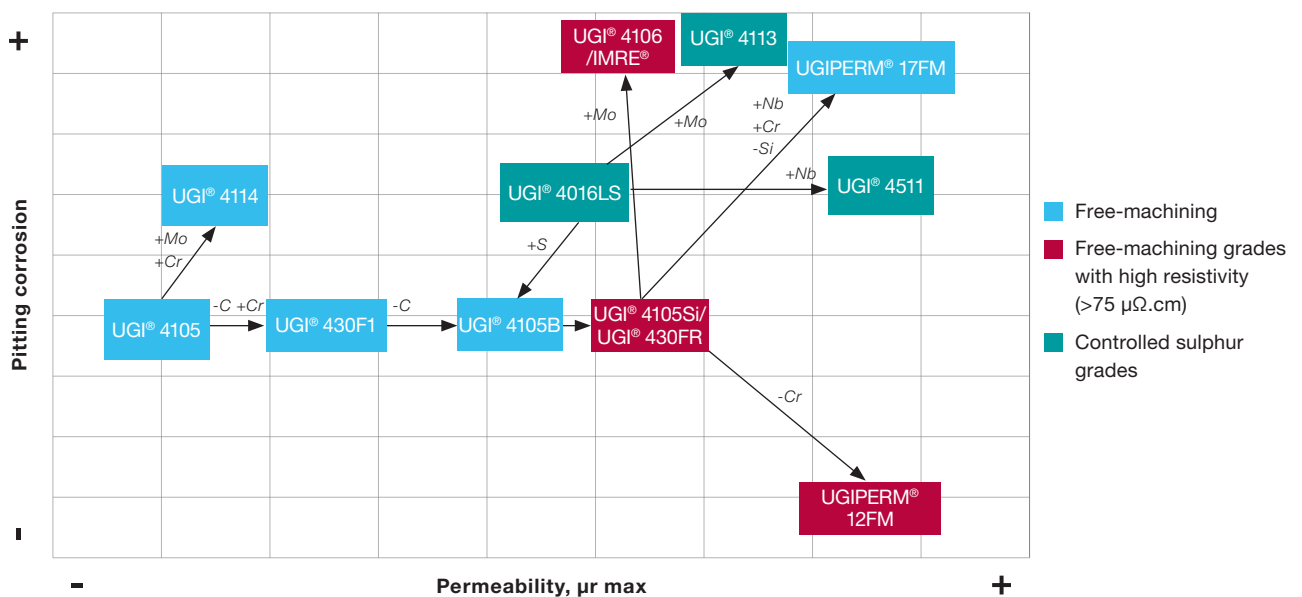




# Martensitic steels

These grades are magnetically harder than ferritic steels ( $H_c > 1000 \text{ A/m}$ ). They are recommended when you want a trade-off between ferromagnetic properties and high mechanical strength. Their scope of application is very broad, from actuators to sensors.

Magnetic properties depend greatly on the heat treatments performed (quenching and tempering) and are therefore not independent of the mechanical properties. Depending on the trade-off wanted (between mechanical and magnetic properties), please consult us.

## Ranges of variation in the magnetic properties of certain martensitic grades

Grades	$\mu_r$ max	$H_c$ (A/m)	$J_s$ (T)	$\rho$ ( $\mu\Omega \cdot \text{cm}$ )	Corrosion	Machinability
UGI® 4034	$\leq 600$	1000 - 7000	1.30 - 1.75	55	•	•
UGI® 4313	$\leq 300$	1000 - 3000	1.30 - 1.65	60	•••	•
UGI® 4418	$\leq 300$	1000 - 3000	1.10 - 1.50	80	••••	•
UGI® 4542	$\leq 400$	500 - 4000	1.00 - 1.50	72	•••••	•

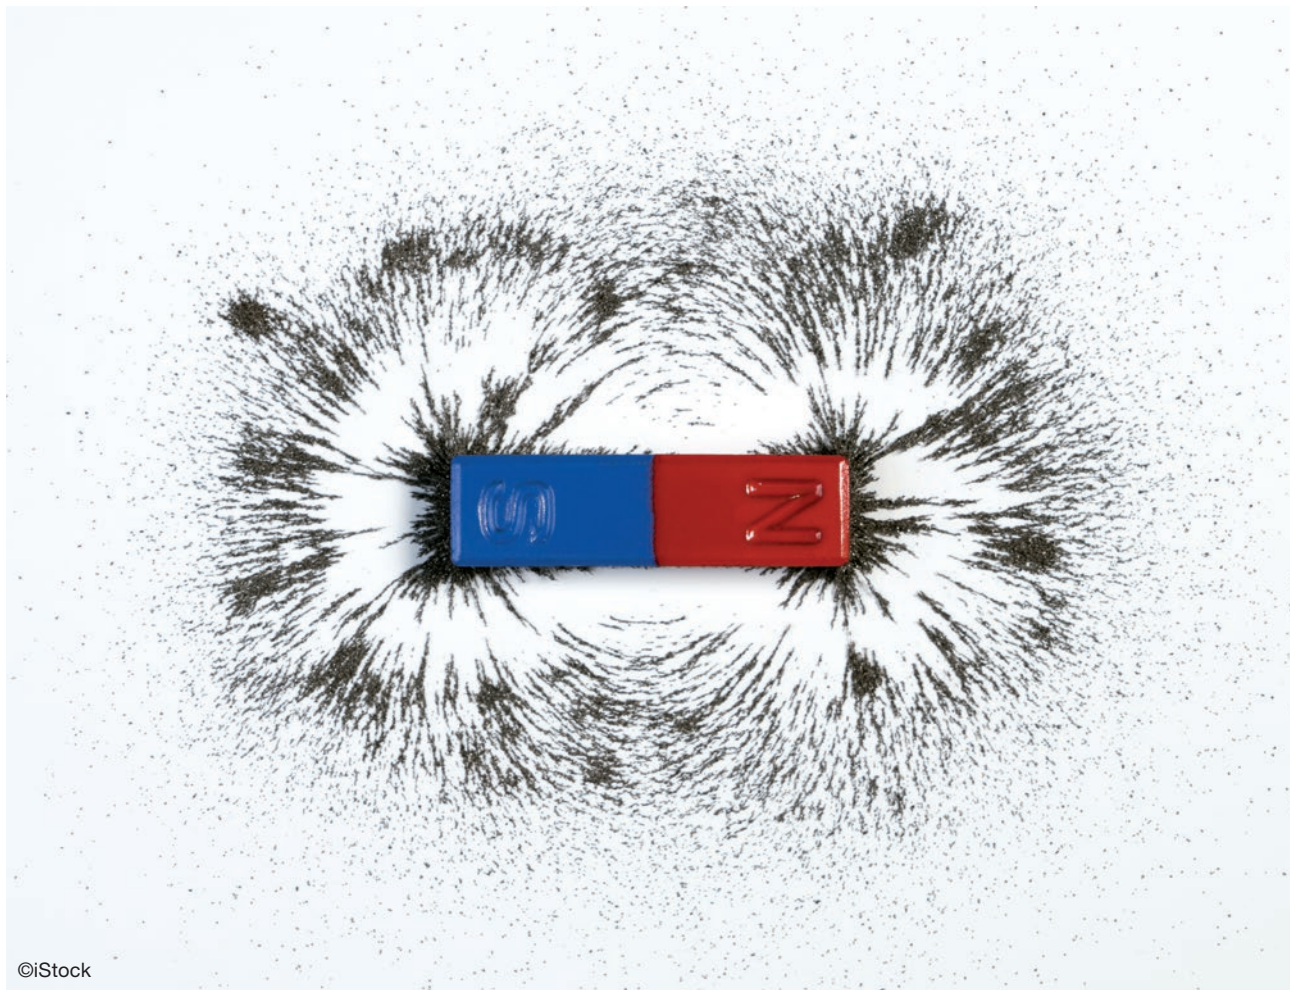


©iStock

# Size ranges and services



		Round bars	Hexagonal bars	Shaped bars
Size range	Without magnetic annealing	2 – 76 mm	3 – 55 mm	As per drawing
	Magnetic annealing **	4.5 – 28 mm *	4.5 – 28 mm	As per drawing
Finishes		Turned and polished Drawn Ground	Drawn	Drawn
Lengths		1.5 – 4.0 m	1.5 – 4.0 m	As per drawing
Tolerances		As per ISO or EN standards or as per customer specification		
Ultrasonic inspection		10 – 28 mm	-	-
Eddy current testing		3 – 76 mm	3 – 55 mm	-

- Metallurgical condition with or without magnetic annealing.
- Finishes: drawn, turned and polished or ground

## Principle of an electromagnet fuel injector

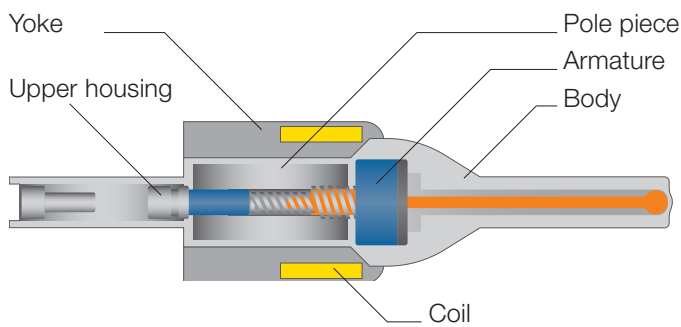

## Principle of a solenoid valve

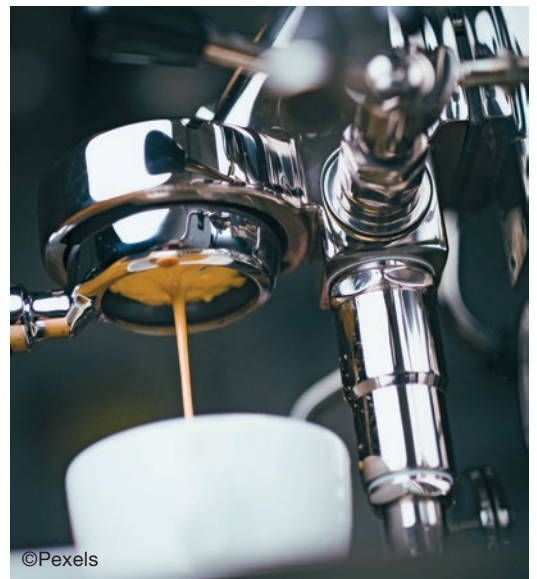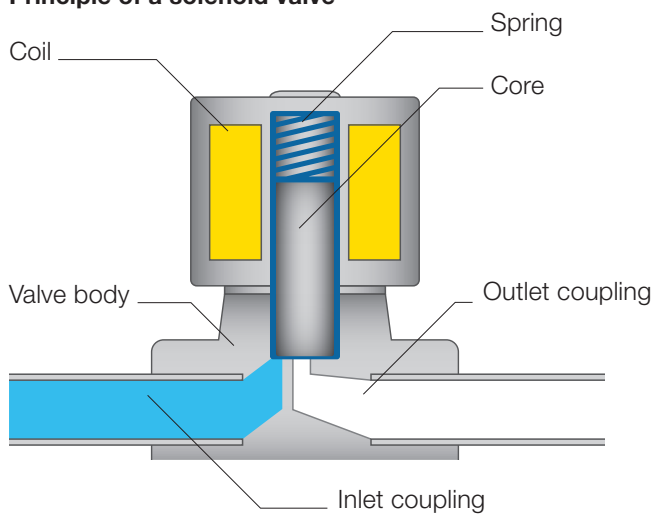

\*Other cases: please consult us  
\*\*Annealing applies only to ferritic grades

# Quality management specifically for the magnetism market

---

Regarding quality control and product conformity, Ugitech has

## ISO 17025

certification in an area ranging from chemical analysis to mechanical testing, and including metallographic inspections and non-destructive inspections.

---

To qualify the materials, Ugitech has the whole range of magnetic measurement techniques, all standardized:

- Type A direct-current permeameter: measurement on bars as per EN 60404-4 and ASTM A341/A341M
- Coercimeter for measurements on bars or on parts (EN 60404-7)
- Permeability measurement on feebly magnetic materials

For ferromagnetic grades, a permeameter can be used to determine the B(H) curves of first magnetization and the hysteresis cycle, from which the values  $\mu_r$  max,  $H_c$ ,  $B_r$  and  $J_s$  are deduced.

To allow for the requirements of markets using magnetic products, Ugitech has integrated several certifications: ISO 9001 and ISO TS 16496.

Ugitech is equipped with the latest non-destructive inspection technologies (eddy current, ultrasonic) for inspecting magnetic grades.



**Ugitech SA**

**France**

Avenue Paul Girod

CS90100

73403 UGINE Cedex

Tel.: + 33 (0)4 79 89 30 30

Fax: + 33 (0)4 79 89 34 34

E-mail: barsales@ugitech.com

[www.ugitech.com](http://www.ugitech.com)

The information and data presented here in are typical or average values and are not a guarantee of maximum or minimum values. Only the information reported on our material certificates is to be considered as relevant. Applications specifically suggested for material described herein are made for the purpose of illustration only to enable the reader to make its own evaluation and are not intended as warranties, either express or implied, of fitness for any purposes.